


8 differential digital Inputs (-4 to 5V)

Terminating resistors can be mounted on a tiny external pcb board, connected by a DSUB connector --- reference voltage can be connected to all negativ inputs. This should make this input very flexible.

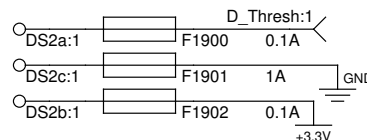

DAD/DSO, Digital Input	
File: Digital_In_C.sch	Sheet: 19 of 19
Author: S. Salewski	Rev: Copy of sheet 10
Copyright: All Rights Reserved	Date: 19--AUG--2009